
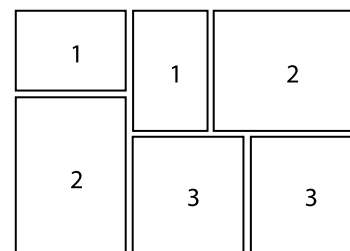


TECHNICAL INFORMATION

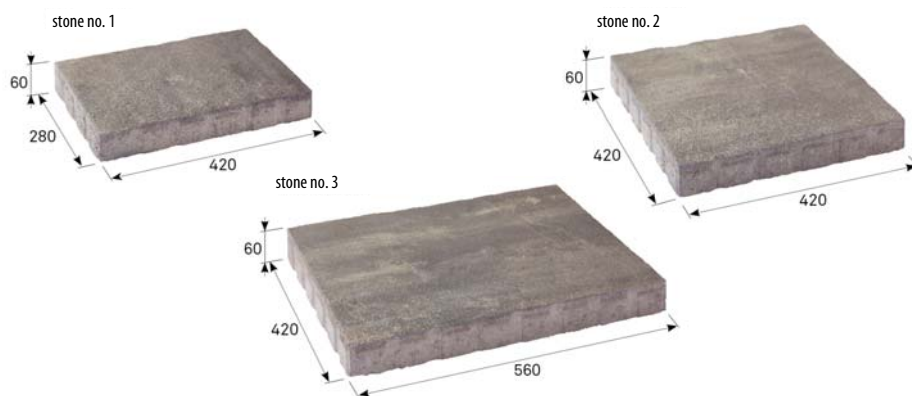

Layout dimensions, set of 3 types of stones

Indicative composition of stones on the layer

name	layout dimensions (mm)			indicative number of pieces on the layer	quantity (m ²)		weight (kg)			max. tonnage up to 24 t		
	height	length	width		layer	pallet	layer	pallet	pallet included	pcs of pallets	m ²	
BEST ALTEA 	stone no. 1	60	420	280	2	1.06	12.72	136	1632	1662	14	178.08
	stone no. 2	60	560	420	2							
	stone no. 3	60	420	420	2							

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	production standard	maximum deviation from declared production dimensions		bending strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
		width and length	height			
60 mm	ČSN EN 1339	±2 mm	±3 mm	≥ 5 MPa	≥ 40	≤ 1.0 kg/m ² after 100 cycles

EXPLANATIONS OF PICTOGRAMS



Paving designed for sidewalks, bicycle paths and non-motorized traffic.



Surface relief



Surface VELVET UV




Facet mini

SURFACE FINISHES AND COLOURS




NATURAL



COLORMIX ARABICA



COLORMIX BRILANT



COLORMIX SAND

surface	characteristics	colour
RELIEF	shaped surface with natural roughness, where the visible layer is formed by the height differences between the different levels of the stone	natural, colormix arabica, brilant, sand
VELVET UV	smoothed surface with polyurethane coating, which creates a protective film on the surface of the paving by means of UV radiation	natural, colormix arabica, brilant, sand

GENERAL INFORMATION

Two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The paving has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

The minimum shipping quantity is 1 layer; the stones cannot be delivered individually and it is not possible to determine the ratio of stones in the composition. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz).

Caution: BEST ALTEA paving is not intended for vehicle travel; we do not recommend compacting with a vibrating.

