




TECHNICAL INFORMATION

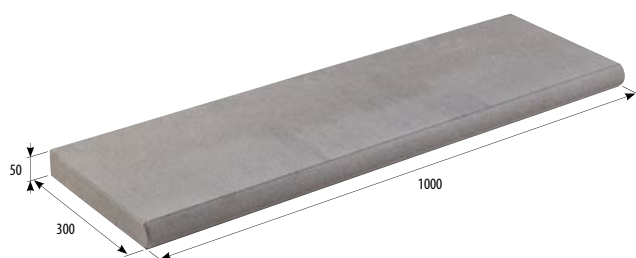

Layout dimensions

name	layout dimensions (mm)			consumption	quantity (pcs)		weight (kg)			max. tonnage up to 24 t	
	height	length	width	pcs/lm	layer	pallet	pcs	pallet	pallet included	pcs of pallets	m ²
BEST POOL RIM 	50	1000	300	1	15	30	34	1020	1050	22	660

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 5000, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

production standard	maximum deviation from declared production dimensions		skid/slip resistance
	width and length	height	
PN-BEST-29-2022	± 2 mm	± 3 mm	≥ 40

EXPLANATIONS OF PICTOGRAMS



Curbs for walking surfaces



Surface basic



Q SAVE protection system


SURFACE FINISHES AND COLOURS



NATURAL




ANTHRACITE



COLORMIX ARABICA



COLORMIX BRILANT



COLORMIX SAND

surface	characteristics	colour
STANDARD	standard surface with natural aggregate roughness corresponding to the visible layer of concrete paving	natural, anthracite, colormix arabica, colormix brilant, colormix sand

GENERAL INFORMATION

Vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The rim has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

Minimum shipping quantity is 1 layer, stones cannot be shipped as single units. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz).

Tip for laying: pool rims are glued over the entire surface with a frost-resistant adhesive and the joints are sealed with silicone.



584/2017

