



## TECHNICAL INFORMATION

BEST KLASIKO

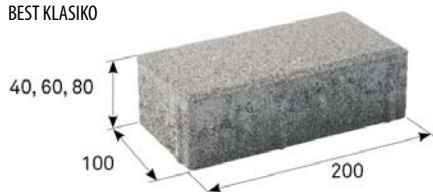

BEST KLASIKO straight

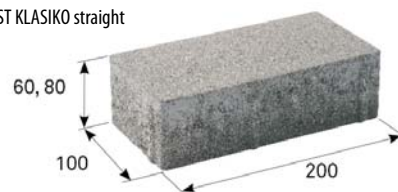

Layout dimensions

name		layout dimensions (mm)			number of pieces on one layer	quantity (m <sup>2</sup> )		weight (kg)			max. tonnage up to 24 t	
		height	length	width		layer	pallet	layer	pallet	pallet included	pcs of pallets	m <sup>2</sup>
BEST KLASIKO*		40	200	100	48	0.96	19.20	85	1700	1730	14	268.80
BEST KLASIKO*		60	200	100	48	0.96	11.52	123	1476	1506	15	172.80
BEST KLASIKO straight*		60	200	100	48	0.96	11.52	123	1476	1506	15	172.80
BEST KLASIKO*		80	200	100	48	0.96	9.60	163	1630	1660	14	134.40
BEST KLASIKO straight*		80	200	100	48	0.96	9.60	163	1630	1660	14	134.40

\*for BEST KLASIKO paving in heights of 40, 60 and 80 mm, the number of m<sup>2</sup> per layer (pallet) may vary in some plants.

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	production standard	maximum deviation from declared production dimensions		transverse tensile strength	bending strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
		width and length	height				
40 mm	ČSN EN 1339	±5 mm	±3 mm	x	≥ 5 MPa	satisfactory	≤ 1.0 kg/m <sup>2</sup> after 100 cycles
60 mm	ČSN EN 1338	±2 mm	±3 mm	≥ 3.6 MPa	x	satisfactory	≤ 1.0 kg/m <sup>2</sup> after 100 cycles
80 mm	ČSN EN 1338	±2 mm	±3 mm	≥ 3.6 MPa	x	satisfactory	≤ 1.0 kg/m <sup>2</sup> after 100 cycles

## EXPLANATIONS OF PICTOGRAMS



Paving designed for sidewalks, bicycle paths and non-motorized traffic.



Surface basic



Facet classic



Paving intended for sidewalks, bicycle paths, parking spaces and movement of motor vehicles up to 3.5 t.



No facet




Paving intended for sidewalks, bicycle paths, parking spaces and movement of motor vehicles up to 3.5 t with occasional movement over 3.5 t (garbage trucks, supply).


## SURFACE FINISHES AND COLOURS



COLORMIX AUTUMN




COLORMIX SAHARA



NATURAL



RED



CAMEL



SANDSTONE



ANTHRACITE

surface	characteristics	colour
STANDARD	standard surface with natural aggregate roughness corresponding to the visible layer of concrete paving	colormix autumn, colormix sahara, natural, red, caramel, sandstone, anthracite

## GENERAL INFORMATION

Two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The paving has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

Minimum shipping quantity is 1 layer, stones cannot be shipped as single units. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use ([www.best.cz](http://www.best.cz)).

**Caution:** These pavings with a height of 40 and 60 mm are recommended to be compacted with a vibrating plate with a plastic pad weighing no more than 100-130 kg with a set centrifugal force of 18-20 kN; paving with a height of 80 mm must be compacted with a vibrating plate with a plastic pad weighing no more than 170-200 kg with a set centrifugal force of 20-30 kN.

