


TECHNICAL INFORMATION

BEST LEGENDA I



BEST LEGENDA II

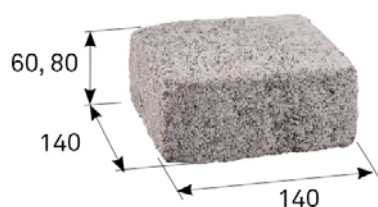

Layout dimensions

name		layout dimensions (mm)			number of pieces on one layer	quantity (m ²)		weight (kg)			max. tonnage up to 24 t	
		height	length	width		layer	pallet	layer	pallet	pallet included	pcs of pallets	m ²
BEST LEGENDA I		60	140	140	40	0.78	9.36	100	1200	1230	19	177.84
BEST LEGENDA II		60	210	140	30	0.88	10.56	113	1356	1386	17	179.52
BEST LEGENDA I		80	140	140	40	0.78	7.80	133	1330	1360	17	132.60
BEST LEGENDA II		80	210	140	30	0.88	8.80	150	1500	1530	15	132.00

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	production standard	maximum deviation from declared production dimensions		transverse tensile strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
		width and length	height			
60 mm	PN-BEST-10-2010	±5 mm	±3 mm	≥ 3.6 MPa	satisfactory	≤ 1.0 kg/m ² after 100 cycles
80 mm	PN-BEST-10-2010	±5 mm	±3 mm	≥ 3.6 MPa	satisfactory	≤ 1.0 kg/m ² after 100 cycles

EXPLANATIONS OF PICTOGRAMS



Paving designed for sidewalks, bicycle paths and non-motorized traffic.



Paving intended for sidewalks, bicycle paths, parking spaces and movement of motor vehicles up to 3.5 t.



Surface sharpened

SURFACE FINISHES AND COLOURS



CARAMEL



COLORMIX AUTUMN



COLORMIX SAHARA

surface	characteristics	colour
SHARPENED	sharpened surface on all sides of the stone, edges irregularly bevelled	CARAMEL, colormix autumn, colormix sahara

GENERAL INFORMATION

Two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The paving has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

Minimum shipping quantity is 1 layer, stones cannot be shipped as single units. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz). We recommend to define joints of 3-5 mm between the stones.

Caution: BEST LEGENDA paving with a height of 60 mm is recommended to be compacted with a vibrating plate with a plastic pad weighing no more than 100-130 kg with a set centrifugal force of 18-20 kN; paving with a height of 80 mm must be compacted with a vibrating plate with a plastic pad weighing no more than 170-200 kg with a set centrifugal force of 20-30 kN.



703/2020



POKROČILÉ STAVEBNÍ MATERIÁLY,
KONSTRUKCE A TECHNOLOGIE

VYSOKÉ UČENÍ / FAKULTA
TECHNICKÉ STAVEBNÍ
V BRNĚ