
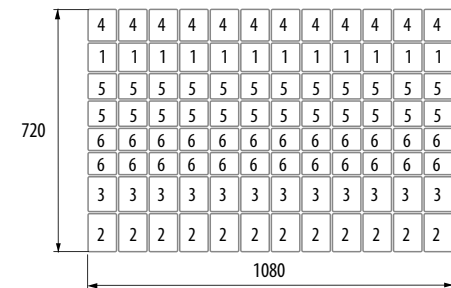


## TECHNICAL INFORMATION

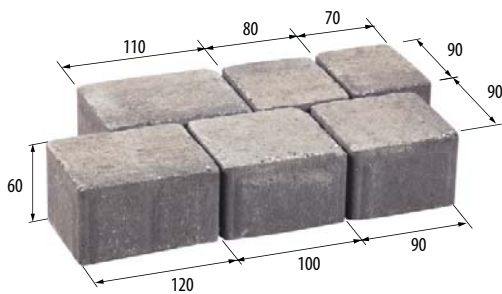

Layout dimensions, set of 6 types of stones

Indicative composition of stones on the layer

name	layout dimensions (mm)			Number of pieces on the layer	quantity (m <sup>2</sup> )		weight (kg)			max. tonnage up to 24 t		
	height	length	width		layer	pallet	layer	pallet	pallet included	pcs of pallets	m <sup>2</sup>	
<b>BEST MENTO</b> 	stone no. 1	60	90	90	12	0.76	9.12	97	1164	1194	19	173.28
	stone no. 2	60	120	90	12							
	stone no. 3	60	110	90	12							
	stone no. 4	60	100	90	12							
	stone no. 5	60	80	90	24							
	stone no. 6	60	70	90	24							

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	production standard	maximum deviation from declared production dimensions		transverse tensile strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
		width and length	height			
60 mm	ČSN EN 1338	±2 mm	±3 mm	≥ 3.6 MPa	satisfactory	≤ 1.0 kg/m <sup>2</sup> after 100 cycles

### EXPLANATIONS OF PICTOGRAMS



Paving designed for sidewalks, bicycle paths and non-motorized traffic.



Surface Metropol




No facet

## SURFACE FINISHES AND COLOURS



ANTHRACITE



NATURAL



WHITE

surface	characteristics	colour
METROPOL	blast-treated surface produced according to a special recipe using coloured grits	anthracite, natural, white

## GENERAL INFORMATION

Two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The paving has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

The minimum shipping quantity is 1 layer; the stones cannot be delivered individually and it is not possible to determine the ratio of stones in the composition. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use ([www.best.cz](http://www.best.cz)).

**Caution:** BEST MENTO paving must be compacted with a vibrating plate with a plastic pad weighing no more than 100-130 kg with a set centrifugal force of 18-20 kN.



703/2020

