



TECHNICAL INFORMATION



name	layout dimensions (mm)			consumption (pcs/lm)	quantity (pcs)		weight (kg)			max. tonnage up to 24 tonnes	
	height	footprint length	width		layer	pallet	pcs	pallet	including pallet	number of pallets	pcs
BEST STAIR STONE	160	330	1000	1	2	10	147	1470	1508	15	150

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

production standard	maximum deviation from declared production dimensions		bending strength	skid/slip resistance
	width and length	height		
ČSN EN 1339	± 5 mm	± 5 mm	≥ 3.5 MPa	satisfactory

EXPLANATIONS OF PICTOGRAMS



Surface
chipped

SURFACE FINISHES AND COLOURS



COLORMIX BRILANT



COLORMIX SAND


surface	characteristics	colour
CHIPPED	individual concrete blocks are split using the jaws of the splitter	colormix brilant, colormix sand

GENERAL INFORMATION

Two-layer vibrated element with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The staircase element has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

The minimum shipping quantity is 1 piece. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz).

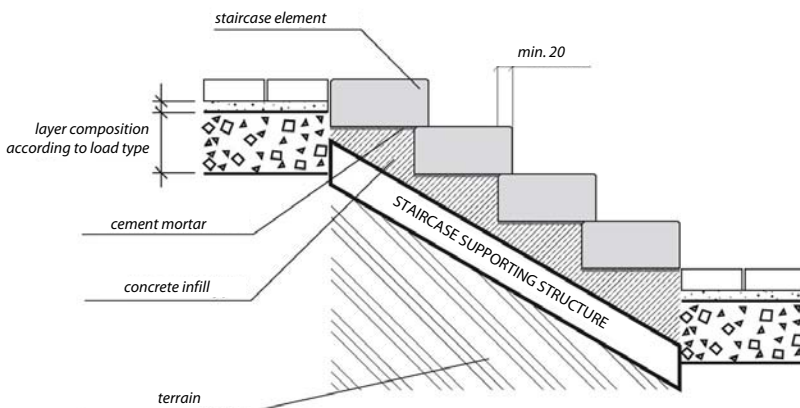

- the steps can be placed in a damp concrete mix or they can be mounted on pre-concreted stair treads fully in the mortar bed 30 mm
- the width of the tread can be selected by the relative position of the fittings
- the joints between the elements are always filled with waterproof and frost-resistant grout
- installation starts from the bottom

