



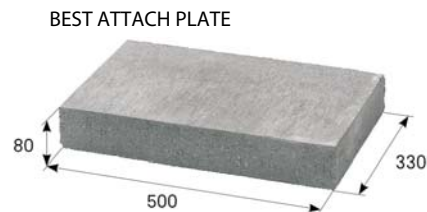

TECHNICAL INFORMATION

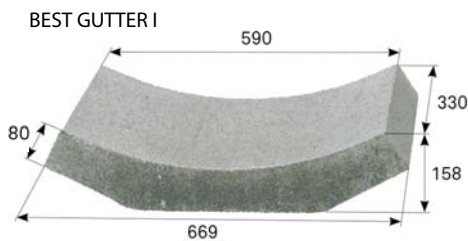

Layout dimensions

name	layout dimensions (mm)			quantity (pcs)		weight (kg)			max. tonnage up to 24 tonnes	
	height	length	width	layer	pallet	pcs	pallet	pallet included	number of pallets	m ²
BEST GUTTER I	80	330	590/669	10	30	46	1380	1410	17	510
BEST ATTACH PLATE	80	330	500	20	60	30	1800	1830	13	780

These values vary depending on the production capabilities of individual BEST plants, see www.best.cz for details.

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to company and European harmonized standards.

name	product height	production standard	maximum deviation from declared production dimensions		bending tensile strength	ČSN 73 1326, weather resistance, method A
			width and height	length		
BEST GUTTER I	80 mm	PN BEST-23-2014	±3 % (min. 3 mm, max. 5 mm)	±1 % (min. 4 mm, max. 10 mm)	≥ 4.0 MPa	≤ 1.0 kg/m ² after 100 cycles


name	product height	production standard	maximum deviation from declared production dimensions		bending strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
			width and length	height			
BEST - ATTACH PLATE	80 mm	ČSN EN 1339	±5 mm	±3 mm	≥ 5 MPa	satisfactory	≤ 1.0 kg/m ² after 100 cycles

EXPLANATIONS OF PICTOGRAMS



Surface basic

SURFACE FINISHES AND COLOURS



NATURAL

surface	characteristics	colour
STANDARD	standard surface with natural aggregate roughness corresponding to the visible layer of concrete paving	natural

GENERAL INFORMATION

Two-layer vibrated drainage element with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The curb has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

The minimum shipping quantity is 1 piece. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz).

Use: BEST ATTACH PLATE creates an extension of the drainage channel from the elements of BEST GUTTER I.

The MPVA certification and the Czech quality label apply to the BEST ATTACH PLATE element.

